

TABLET U11I-EX


ZONE 2/22

The Durabook U11I-EX is a fully rugged 11.6-inch tablet designed for demanding industrial environments. Powered by 12th Gen Intel® Core™ processors and featuring a Full HD DynaVue® display, it delivers reliable performance in extreme conditions, including dust, water (IP66), and temperature extremes. The tablet offers Intel® Iris® Xe graphics, optional 4G/5G connectivity, a swappable battery, and ATEX and MIL-STD-810H certifications, combining high performance with maximum durability for hazardous work environments.



Advantages:

- Rugged design with MIL-STD-810H and IP66 certification.
- 11.6" Full HD display with high-brightness DynaVue® technology.
- 12th Gen Intel® Core™ processors with Intel® Iris® Xe graphics.
- Optional 4G/5G, GPS, and communication modules.
- Swappable battery and resistance to extreme working conditions.

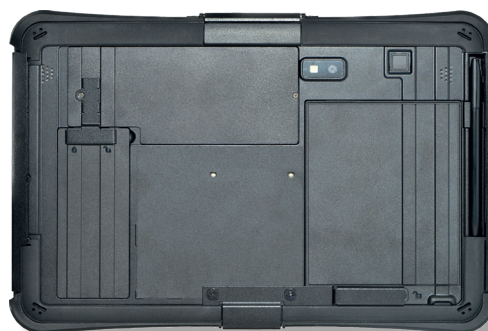

TABLET U111-EX

ZONE 2/22

Technical features:	
Operating system	Windows® 11 Pro 64-bit
Processor	- Intel®Core™ i7-1250U (12th Gen) Processor with vPro™ (12MB Cache, up to 4.7 GHz, 2P+8E cores) - Intel®Core™ i5-1230U (12th Gen) Processor with vPro™ (12MB Cache, up to 4.4 GHz, 2P+8E cores)
Memory	Onboard 8GB up to 32GB (LPDDR4x)
STORAGE	256GB NVME PCIE SSD Optional 512GB/1TB/2TB PCIE SSD
GRAPHICS	Intel®Iris® Xe Graphics
COMMUNICATIONS	- Integrated 10/100/1000 Ethernet - Intel® Wi-Fi 6E AX211 (802.11ax) - Bluetooth® V5.3 - Optional dedicated GPS module (UBLOX-NEO-M9N) 1 - Optional 4G LTE multi-carrier mobile broadband 1 - Optional 5G (project based) 1
Dimensions	Size: 317 × 215 × 23,8 mm Weight: 1490g
Display	11.6" FHD (1920 × 1080)
Battery	Standard 4800mAh: ~10 hours; Optional hi-cap battery Li-Ion 7.6V, 9600mAh, 20 hours
Camera	Front: 2 MP Optional rear: 11 MP with autofocus
I/O INTERFACES	Thunderbolt™ 4, USB 3.2 Gen2 Type-C (DisplayPort), optional Smart Card reader, Wi-Fi 6E, Bluetooth® 5.3, optional LTE & GPS
SECURITY	• Intel®vPro™ Technology (per CPU options) • TPM 2.0 • NIST BIOS compliant • Stealth mode • Secured-Core PC
Types of protection	IP66 MIL-STD-810H Operating Temperature: - 20°C up to 60°C

CECHA PRZECIWIYBUCHOWA:

Ex II 3G Ex ic IIC T4 Gc

Ex II 3D Ex ic IIIB T135°C Dc